

# *safeTcork*<sup>®</sup>

RUBBER AND VINYL TILE AND TREAD



proudly made in the  


**ROPPE.**  
Proven. Flooring. Experiences.



# safeTcork® rubber

## TILE AND TREAD

The specially formulated blend of rubber and cork in our SafeTcork® Slip Resistant Rubber Tile & Tread teams safety with a unique aesthetic appeal. The natural slip resistance of rubber combined with cork – a renewable resource – makes it an ideal choice for education settings, churches, assisted living facilities and multipurpose rooms.

**ROPPE**  
Proven. Flooring. Experiences.

# safeTcork® rubber

## SLIP RESISTANT TILE AND TREAD


Z100 black	Z177 steel blue	Z150 dark gray	Z616 platinum	Z193 black brown	Z123 charcoal	Z114 lunar dust	Z129 dolphin
Z178 pewter	Z194 burnt umber	Z148 steel gray	Z175 slate	Z174 smoke	Z197 iceberg		
Z110 brown	Z147 light brown	Z619 java	Z181 russet	Z182 toffee	Z623 nutmeg	Z624 chameleon	Z140 fawn
Z191 camel	Z125 fig	Z171 sandstone	Z130 buckskin	Z198 ivory	Z632 flax	Z184 almond	Z170 white
Z131 bisque	Z629 golden	Z127 harvest yellow	Z631 sahara	Z622 brass	Z625 bronze	Z124 taupe	Z122 natural
Z633 ginkgo	Z628 shamrock	Z195 light gray	Z116 moss	Z634 olive	Z630 pine	Z113 pistachio	Z160 forest green
Z118 peacock	Z169 hunter green	Z146 turquoise	Z606 tropical blue	Z187 blue	Z154 salem blue	Z165 colonial blue	Z139 deep navy
Z627 mariner	Z618 aubergine	Z621 merlin	Z620 plum	Z185 burgundy	Z137 cinnabar	Z186 red	Z613 azalea
Z615 cream	Z626 tangerine	Z617 terracotta	Z188 brick	Z120 tan	Z133 golden honey	Z167 spice	Z161 snow

### | SAFETCORK FIESTA |

ZF401 camello	ZF404 niebla	ZF407 tierra	ZF408 marron	ZF409 oscuro	ZF410 marengo	ZF411 fiel	ZF413 amarillo

# safeTcork® vinyl


## SOLID VINYL TILE

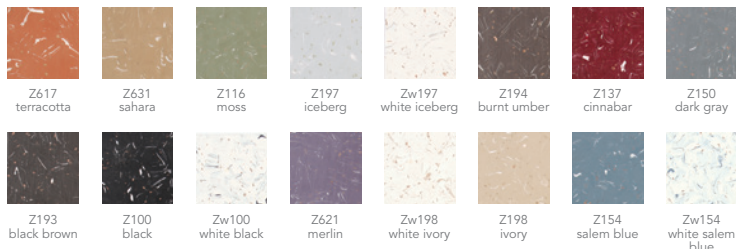

SafeTcork® Vinyl Tile is great for installations that require minimal maintenance requirements as it easily buffs to a shine with no finishes required! It's also colorful, stylish and available in some coordinating white marble designs.

24" x 24" and 36" x 36" available pre-grooved for heat weldable installations.

### vinyl welding bead colors



# safeTcork® vinyl

## SOLID VINYL TILE

SafeTcork® solid vinyl tile is durable, versatile and easy to maintain, and comes with the natural slip resistance of cork, now with Options! Choose from any of the standard 12 colors on a white background – in any combination of 1, 2 or 3 chip colors – and create your own tile. What else could be better than limitless options?



Cork is the bark of the Cork Oak Tree which has an average life span of 150-250 years.

The cork is harvested in 9 year cycles. Our cork is obtained as post-industrial waste from bottle cork manufacturers who grind the gaskets into the granules that are visible throughout the thickness of SafeTcork® Rubber and Vinyl products.

**ROPPE**  
Proven. Flooring. Experiences.

# safeTcork® rubber

SLIP RESISTANT TILE AND TREAD

Q6  
quicksix



SafeTMax®

- PVC free, phthalate free and Red List chemical free
- Made in the U.S.A. and meets FloorScore®, NSF332 Gold and CHPS criteria.
- Formulated from a unique combination of SBR rubber and cork.
- Cork content provides aesthetic appeal and may improve slip resistance when moisture is present, under ASTM D-2047 (modification).
- Available in all raised design rubber tile and tread profiles, smooth profile tile and tread profiles, and Dimensions rubber tile.
- All colors available at a Single Price Point within your selected palette. Choose from solid colors and Fiesta® patterns.



# safeTcork® vinyl

SOLID VINYL TILE

Q6  
quicksix



SafeTMax®

- Formulated using non-phthalate plasticizers and 2% epoxidized soybean oil, a renewable resource.
- Made in the U.S.A. and meets FloorScore®, NSF332 Silver and CHPS criteria.
- Cork content provides aesthetic appeal and may improve slip resistance when moisture is present, under ASTM D-2047 (modification), while built-in antimicrobial agents inhibit mold and mildew and meet ASTM G-21.
- Available in .080" thick 12" x 12" and pre-grooved, heat weld 24" x 24" or 36" x 36" tiles for seamless installation with matching vinyl welding beads.
- Flexible enough to self-cove during installation, but can withstand extreme rolling loads up to 2,000 psi.
- Color is inherent throughout the tile thickness and available at a Single Price Point.



## Recommended Adhesives



## Recommended Tile Adhesives

- SP-500 Acrylic Aerosol Adhesive
- AW-510 Acrylic Wet Set Adhesive
- AP-520 Acrylic Roll-On Adhesive
- MS-700 Modified Silane Wet Set Adhesive
- EW-710 Epoxy Modified Urethane Adhesive



## Recommended Tread Adhesives

- AW-510 Acrylic Wet Set Adhesive
- EW-710 Epoxy Modified Urethane Adhesive
- TP-620 Pressure Sensitive Tape Adhesive
- C-630 Water Based Contact Adhesive
- EN-610 Epoxy Nose Filler



## Maintenance

Roppe products are easy to maintain using our new Excelsior™ Maintenance Products. Visit [roppe.com](http://roppe.com) for available options for cleaning and finishing.

**ROPPE**  
Proven Flooring Experiences.

1.800.537.9527 | [www.roppe.com](http://www.roppe.com)



Your link to Roppe products and LEED® documentation. For more information, please visit: [roppe.com](http://roppe.com).



Your link to Roppe products and product documentation for LEED, B.C. WELL, GreenGlobes Rating Systems as well as Federal Standards.

Explore your options with our online FLOORING DESIGNER at [roppe.com](http://roppe.com)

