

#301 Subleveler

Manufacturer

Roppe Corporation
 1602 N. Union Street
 P.O. Box 1158
 Fostoria, Ohio USA 44830-1158
 Website - www.roppe.com
 t: (419) 435.8546 tf: (800) 537.9527
 f: (419) 435.1056
 e-mail: sales@roppe.com


Product Description

Roppe's Subleveler system is a solid, homogeneous, thermoplastic product made to level or ramp resilient flooring products. Our Subleveler is tapered to provide a smooth transition between uneven substrate, creating a surface that can immediately accept new flooring without the interruption of foot traffic.

Features

- Extremely Durable & Flexible
- Fast & Easy Installation
- Made from 100% Recycled Materials
- Recyclable (IMPACT Recycling Program)
- Qualifies for LEED® Credits
- FloorScore® Certified

#301 Subleveler

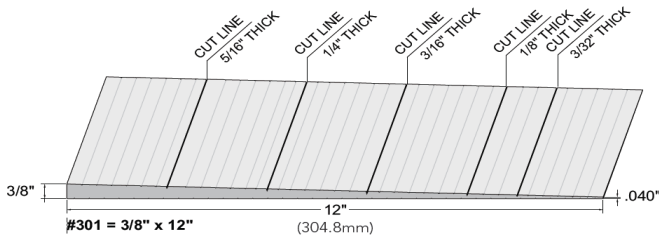

- Starting Thickness: **0.040" (1 mm)**
- Cut Mark Thicknesses: **3/32" (2.39 mm)**
1/8" (3.17 mm)
3/16" (4.76 mm)
1/4" (6.35 mm)
5/16" (7.93 mm)
- Final Thickness: **3/8" (9.53 mm)**
- Width: **48" (1.22 m)**
- Length: **12" (30.48 cm)**
- Carton Quantity: **8 Pieces**
- Weight Per Piece: **7.5 lbs.**
- Color: **Black only**

Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies
 ASTM E84 - Flammability: Class A
 ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I,
 > .045 W/cm²

ASTM E662 (NFPA 258) - Smoke Density: Passes, <450
 ASTM F925 - Chemical Resistance: Passes (chart available)
 ASTM F970 - Static Load Limit: Passes, 250 PSI
 ASTM F970 - (Modified) Max Weight: 1000 PSI
 Acclimation Time: 48 hours
 Storage & Acclimation Temperature: 65 ° - 85 ° F

Adhesives* ([Visit our website for complete Adhesive instructions](#))

AW-510 Acrylic Wet-Set Adhesive

Unit Size: 1 or 4 gallon units
 VOC: < 0.1 g/l
 Coverage Rate: 160 sq. ft. per gallon
 Substrate: Porous

MS-700 Modified Silane Adhesive

Unit Size: 3 Gallons
 VOC: 0 g/l
 Porous Coverage Rate: 160 sq. ft. per gallon
 Non-Porous Coverage Rate: 235 sq. ft. per gallon
 Substrate: Porous & Non-Porous

EW-710 Epoxy Wet-Set Adhesive

Unit Size: 1 Gallon
 VOC: < 12 g/l
 Porous Coverage Rate: 160 sq. ft. per gallon
 Non-Porous Coverage Rate: 235 sq. ft. per gallon
 Substrate: Porous & Non-Porous

Installation* ([Visit our website for complete Installation instructions](#))

Roppe Subleveler is a non-porous material and is considered a non-porous substrate. As such, follow adhesive recommendation of flooring material for a non-porous substrate. Ensure substrate is clean, dry and sound before installing. Prior to installation, dry-lay several subleveler to establish the best layout for the installation area and facility. Inspect all sections before installing or during installation to verify that there are no visible defects, damages or excessive shading variations.

Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit www.roppe.com. or send an email to solutions@roppe.com

Technical Document Support

Additional product resources and technical documents are available online at www.roppe.com. For additional technical support, send an e-mail to solutions@roppe.com

Warranty

Roppe Provides a 1 year Limited Warranty on all Rubber Accessories. For additional information, see associated Warranty documents.

***For complete adhesive & installation instructions, visit www.roppe.com**