

### #304 Subleveler

#### Manufacturer

Roppe Corporation  
1602 N. Union Street  
P.O. Box 1158  
Fostoria, Ohio USA 44830-1158  
Website - [www.roppe.com](http://www.roppe.com)  
t: (419) 435.8546 tf: (800) 537.9527  
f: (419) 435.1056  
e-mail: [sales@roppe.com](mailto:sales@roppe.com)


#### Product Description

Roppe's Subleveler system is a solid, homogeneous, thermoplastic product made to level or ramp resilient flooring products. Our Subleveler is tapered to provide a smooth transition between uneven substrate, creating a surface that can immediately accept new flooring without the interruption of foot traffic.

#### Features

Extremely Durable & Flexible  
Fast & Easy Installation  
Made from 100% Recycled Materials  
Recyclable (IMPACT Recycling Program)  
Qualifies for LEED® Credits  
FloorScore® Certified

### #304 Subleveler

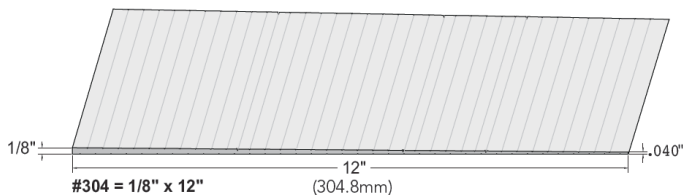

Starting Thickness: **0.040" (1 mm)**

Final Thickness: **1/8" (3.17 mm)**

Width: **12" (30.48 cm)**

Length: **48" (1.22 m) Sections**

Carton Quantity: **16 Pieces**

Weight Per Piece: **3.43 lbs.**

Color: **Black only**

#### Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies  
ASTM E84 - Flammability: Class A  
ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I,  
> .045 W/cm<sup>2</sup>  
ASTM E662 (NFPA 258) - Smoke Density: Passes, <450  
ASTM F925 - Chemical Resistance: Passes (chart available)  
ASTM F970 - Static Load Limit: Passes, 250 PSI

ASTM F970 - (Modified) Max Weight: 1000 PSI

Acclimation Time: 48 hours

Storage & Acclimation Temperature: 65 ° - 85 ° F

**Adhesives\*** ([Visit our website for complete Adhesive instructions](#))

#### AW-510 Acrylic Wet-Set Adhesive

Unit Size: 1 or 4 gallon units

VOC: < 0.1 g/l

Coverage Rate: 160 sq. ft. per gallon

Substrate: Porous

#### MS-700 Modified Silane Adhesive

Unit Size: 3 Gallons

VOC: 0 g/l

Porous Coverage Rate: 160 sq. ft. per gallon

Non-Porous Coverage Rate: 235 sq. ft. per gallon

Substrate: Porous & Non-Porous

#### EW-710 Epoxy Wet-Set Adhesive

Unit Size: 1 Gallon

VOC: < 12 g/l

Porous Coverage Rate: 160 sq. ft. per gallon

Non-Porous Coverage Rate: 235 sq. ft. per gallon

Substrate: Porous & Non-Porous

**Installation\*** ([Visit our website for complete Installation instructions](#))

Roppe Subleveler is a non-porous material and is considered a non-porous substrate. As such, follow adhesive recommendation of flooring material for a non-porous substrate. Ensure substrate is clean, dry and sound before installing. Prior to installation, dry-lay several subleveler to establish the best layout for the installation area and facility. Inspect all sections before installing or during installation to verify that there are no visible defects, damages or excessive shading variations.

#### Availability, Cost & Samples

Roppe Flooring products are sold through distribution.

To locate the nearest distributor, visit [www.roppe.com](http://www.roppe.com).

or send an email to [solutions@roppe.com](mailto:solutions@roppe.com)

#### Technical Document Support

Additional product resources and technical documents are available online at [www.roppe.com](http://www.roppe.com). For additional technical support, send an e-mail to [solutions@roppe.com](mailto:solutions@roppe.com)

#### Warranty

Roppe Provides a 1 year Limited Warranty on all Rubber Accessories. For additional information, see associated Warranty documents.

**\*For complete adhesive & installation instructions, visit [www.roppe.com](http://www.roppe.com)**