

#30 Diamond Square Nose Tread

Manufacturer


Roppe Corporation
1602 N. Union Street
P.O. Box 1158
Fostoria, Ohio USA 44830-1158
Website - www.roppe.com
t: (419) 435.8546 tf: (800) 537.9527
f: (419) 435.1056
e-mail: sales@roppe.com

Product Description

Roppe Rubber Stair Tread are specifically designed for use on all interior stairs, including pan-filled concrete and wood steps. Roppe Rubber Stair Treads are made from specially formed compression-molded high-grade synthetic rubber compound and is non-conductive. Each Product is also a solid, homogeneous and resilient rubber stair tread.

Features

PVC Free	Does Not Require A Finish
Extremely Durable	Excellent Chemical Resistance
ADA Compliant	Recyclable (IMPACT Program)
Excellent Slip Resistance	Optimized For Visually Impaired
FloorScore® Certified	Qualifies for LEED® Credits

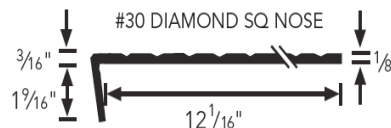

#30 Diamond Square Nose Tread

Nose Type: Square w/ Taper & Relief Cut
Nose Length: 1 9/16" (39.69 mm)
Leading Edge Thickness: 3/16" (4.76 mm)
Back Edge Thickness: 1/8" (3.2 mm)
Tread Depth: 12" (304.8 mm)
Tread Lengths: 36", 42", 48", 54", 60", 72", 84", 96", 108"
(Optional) Safety Strip Width: One 2" (50.8 mm) insert
Safety Strip Spacing: ~3/4" (19 mm) From Nose
Safety Strip Material: Carborundum, Ribbed or Smooth
Coordinating Landing Tile: #631 Diamond Landing Tile
Weight Per Lineal Foot: 2.25 lbs.
Treads Per Carton: 6 (4 for all treads over 72")
Available Color Groups: Solid Color, Symmetry, Marble, Fiesta, Marble Fiesta, SafeTcork & SafeTcork Fiesta.
**Performance Compound Treads are available in solid color only.*

Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies
LEED v2009 IEQ Credit 4.3: Qualifies
ASTM F2169-Resilient Stair Treads: Type TS, Class 1 & 2, Group 1 & 2, Grade 1
ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I, > 0.45 W/cm2
ASTM E662 (NFPA 258) - Smoke Density: Passes, <450
CAN/ULC-S102.2 - Surface Burning: FSR 115, SDS 275
ASTM F925 - Chemical Resistance: Passes
ASTM D2047 - Slip Resistance: >0.6
ASTM F1514 - Heat Stability: Passes
Acclimation Time: 48 Hours
Storage & Acclimation Temperature: 65 ° - 85 ° F

Approved Adhesive* ([Visit our website for complete Adhesive recommendations](#))

AW-510 Acrylic Wet-Set Adhesive
EN-610 Epoxy Nose Filler Adhesive
C-630 Contact Adhesive
TP-620 Pressure Sensitive Tape
MS-700 Modified Silane Adhesive
EW-710 Epoxy Wet-Set Adhesive

Installation* ([Visit our website for complete Installation instructions](#))

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation. Stair Treads must be stored horizontally and placed on a smooth, level, dry surface, which supports the entire width of the stair treads. Ensure substrate is suitably prepared prior to installation.

Maintenance* ([Visit our website for complete Maintenance instructions](#))

Sweep, dust mop or vacuum the stair treads to remove dirt and other particulates.

Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit www.roppe.com. or send an email to solutions@roppe.com

Technical Document Support

Additional product resources and technical documents are available online at www.roppe.com. For additional technical support, send an e-mail to solutions@roppe.com

Warranty

Roppe Provides a 3 year Limited Warranty on all Light Duty Stair Treads and a 5 year Limited Warranty on all Heavy Duty Stair Treads. For additional information, see associated Warranty documents.

***For complete adhesive, installation & maintenance instructions, visit www.roppe.com**