

### #40 Heavy-Duty Square Nose Tread

#### Manufacturer


Roppe Corporation  
 1602 N. Union Street  
 P.O. Box 1158  
 Fostoria, Ohio USA 44830-1158  
 Website - [www.roppe.com](http://www.roppe.com)  
 t: (419) 435.8546 tf: (800) 537.9527  
 f: (419) 435.1056  
 e-mail: [sales@roppe.com](mailto:sales@roppe.com)

#### Product Description

Roppe Rubber Stair Tread are specifically designed for use on all interior stairs, including pan-filled concrete and wood steps. Roppe Rubber Stair Treads are made from specially formed compression-molded high-grade synthetic rubber compound and is non-conductive. Each Product is also a solid, homogeneous and resilient rubber stair tread.

#### Features

PVC Free	Does Not Require A Finish
Extremely Durable	Excellent Chemical Resistance
ADA Compliant	Recyclable (IMPACT Program)
Excellent Slip Resistance	Optimized For Visually Impaired
FloorScore® Certified	Qualifies for LEED® Credits

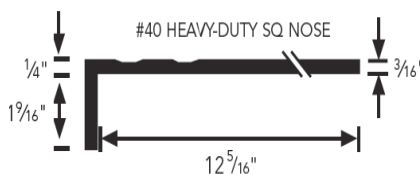

### #40 Heavy-Duty Abrasive Strip Square Nose Tread

Nose Type: Square  
 Nose Length: 1 9/16" (39.69 mm)  
 Leading Edge Thickness: 1/4" (6.35 mm)  
 Back Edge Thickness: 3/16" (4.76 mm)  
 Tread Depth: 12 5/16" (312.26 mm)  
 Tread Lengths: 36", 42", 48", 54", 60", 72"  
 Safety Strip Width: Two 3/4" (19 mm) inserts  
 Safety Strip Spacing: ~3/4" From Nose, 1 1/4" Between  
 Safety Strip Material: Carborundum  
 Coordinating Landing Tile: #969 3/16" Smooth Marble #40  
 Weight Per Lineal Foot: 2.5 lbs.  
 Treads Per Carton: 6  
 Available Color Groups: Solid Color, Symmetry, Marble, Fiesta, Marble Fiesta, SafeTcork & SafeTcork Fiesta.  
*\*Performance Compound Treads are available in solid color only.*

#### Technical Data

LEED v2009 IEQ Credit 4.1: Qualifies  
 LEED v2009 IEQ Credit 4.3: Qualifies  
 ASTM F2169-Resilient Stair Treads: Type TS, Class 1 & 2, Group 1 & 2, Grade 1  
 ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I, > 0.45 W/cm2  
 ASTM E662 (NFPA 258) - Smoke Density: Passes, <450  
 CAN/ULC-S102.2 - Surface Burning: FSR 115, SDS 275  
 ASTM F925 - Chemical Resistance: Passes  
 ASTM D2047 - Slip Resistance: >0.6  
 ASTM F1514 - Heat Stability: Passes  
 Acclimation Time: 48 Hours  
 Storage & Acclimation Temperature: 65 ° - 85 ° F

#### Approved Adhesive\* (Visit our website for complete Adhesive recommendations)

AW-510 Acrylic Wet-Set Adhesive  
 EN-610 Epoxy Nose Filler Adhesive  
 C-630 Contact Adhesive  
 TP-620 Pressure Sensitive Tape  
 MS-700 Modified Silane Adhesive  
 EW-710 Epoxy Wet-Set Adhesive

#### Installation\* (Visit our website for complete Installation instructions)

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation. Stair Treads must be stored horizontally and placed on a smooth, level, dry surface, which supports the entire width of the stair treads. Ensure substrate is suitably prepared prior to installation.

#### Maintenance\* (Visit our website for complete Maintenance instructions)

Sweep, dust mop or vacuum the stair treads to remove dirt and other particulates.

#### Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit [www.roppe.com](http://www.roppe.com). or send an email to [solutions@roppe.com](mailto:solutions@roppe.com)

#### Technical Document Support

Additional product resources and technical documents are available online at [www.roppe.com](http://www.roppe.com). For additional technical support, send an e-mail to [solutions@roppe.com](mailto:solutions@roppe.com)

#### Warranty

Roppe Provides a 3 year Limited Warranty on all Light Duty Stair Treads and a 5 year Limited Warranty on all Heavy Duty Stair Treads. For additional information, see associated Warranty documents.

**\*For complete adhesive, installation & maintenance instructions, visit [www.roppe.com](http://www.roppe.com)**