

### Northern Leathers Vinyl Tile

#### Manufacturer


Roppe Corporation  
1602 N. Union Street  
P.O. Box 1158  
Fostoria, Ohio USA 44830-1158  
Website - [www.roppe.com](http://www.roppe.com)  
t: (419) 435.8546 tf: (800) 537.9527  
f: (419) 435.1056  
e-mail: [sales@roppe.com](mailto:sales@roppe.com)

#### Product Description

Roppe Northern Leathers is designed for use in commercial and residential applications. It contains a 28 mil wear layer topped with C-Shield UV cured ceramic bead finish. The composition ensures a 100% recyclable product. The tile includes an embossed surface to enhance the unique texture of leather, while adding slip resistance qualities to the tile.

#### Features

100% Recyclable	C-Shield UV Finish
Easy to Maintain	Excellent Indentation Resistance
Excellent Slip Resistance	Excellent Chemical Resistance
FloorScore® Certified	Qualifies for LEED® Credits

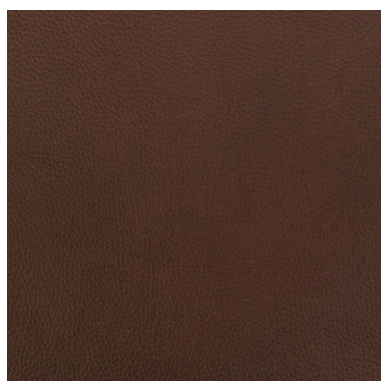

#### Northern Leathers Vinyl Tile

Nominal Dimensions: 18" x 18" x 3 mm tile  
Finish: Embossed  
Wear Layer Thickness: 28 mil (.028")  
Carton Quantity: 16 Tiles  
Colors Available: Ebony, Gunmetal, Java, Auburn, Clay, Amber

#### Technical Data

LEED v2009 MR Credit 6 RRM Content: 12%  
LEED v2009 IEQ Credit 4.1: Qualifies  
LEED v2009 IEQ Credit 4.3: Qualifies  
ASTM F1700 - Solid Vinyl Tile: Class III, Type B  
ASTM E648 (NFPA) - Critical Radiant Flux: Class I, > 0.45 W/cm<sup>2</sup>  
ASTM E662 (NFPA 258) - Smoke Density: Passes, <450  
CAN/ULC-S102.2 - Surface Burning: 30 FSR, 250 SDS

ASTM D2047 - Slip Resistance: > 0.60  
ASTM F970 - Static Load Limit: Passes, 250 PSI  
ASTM F970 (Modified) - Max Weight: 2000 PSI  
ASTM F925 - Chemical Resistance: Passes  
ASTM F1515 - Light Stability: Passes  
ASTM F1914 Residual Indentation: Passes  
ASTM F2199 Dimensional Stability: Passes  
Acclimation Time: 48 Hours  
Storage & Acclimation Temperature: 65 ° - 85 ° F

#### Approved Adhesive\* (Visit our website for complete Adhesive recommendations)

SP-500 Aerosol Adhesive  
AP-520 Acrylic Pressure Sensitive Adhesive  
AW-510 Acrylic Wet-Set Adhesive  
MS-700 Modified Silane Adhesive  
EW-710 Epoxy Wet-Set Adhesive

#### Installation\* (Visit our website for complete Installation instructions)

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation.

#### Maintenance\* (Visit our website for complete Maintenance instructions)

Refer to the Northern Leathers Maintenance document for detailed instructions on our website, [www.roppe.com](http://www.roppe.com)

#### Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit [www.roppe.com](http://www.roppe.com). or send an email to [solutions@roppe.com](mailto:solutions@roppe.com)

#### Technical Document Support

Additional product resources and technical documents are available online at [www.roppe.com](http://www.roppe.com). For additional technical support, send an e-mail to [solutions@roppe.com](mailto:solutions@roppe.com)

#### Warranty

Roppe Provides a 20 year Limited Residential Warranty and a 10 Year Limited Commercial Warranty. For additional information, see associated warranty documents.

**\*For complete adhesive, installation & maintenance instructions, visit [www.roppe.com](http://www.roppe.com)**