

## Roppe Designer's Choice® Tile

### Manufacturer

Roppe Corporation  
 1602 N. Union Street  
 P.O. Box 1158  
 Fostoria, Ohio USA 44830-1158  
 Website - [www.roppe.com](http://www.roppe.com)  
 t: (419) 435.8546 tf: (800) 537.9527  
 f: (419) 435.1056  
 e-mail: [sales@roppe.com](mailto:sales@roppe.com)

### Product Description


Roppe Designer's Choice Rubber Tile is a homogenous rubber tile that features a wide variety of shapes and sizes that provides endless design possibilities. Designer's Choice rubber tiles can be mixed and matched with several geometric precision cut shapes to create patterns and colors without extensive on-site labor.

### Features


- PVC Free
- Customizable Designs
- Extremely Durable
- Superior Slip Resistance
- FloorScore® Certified
- Does Not Require A Finish
- Sound-Reducing Material
- Excellent Chemical Resistance
- Recyclable (IMPACT Program)
- Qualifies for LEED® Credits



### Designer's Choice Standard Patterns

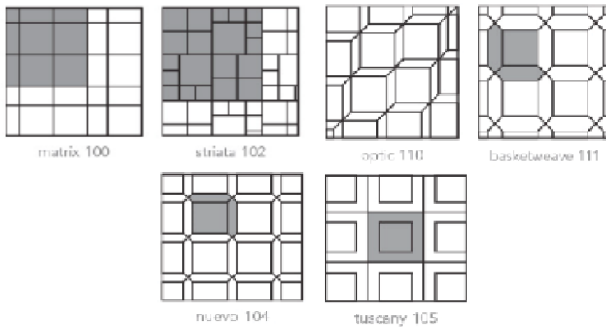

### THE 11 SHAPES THAT MAKE UP DESIGNER'S CHOICE®

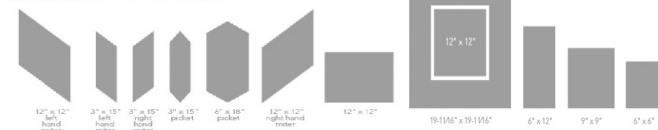

### Designer's Choice®

- Nominal Dimensions Tiles: 6" x 6", 9" x 9", 6" x 12", 12" x 12"
- Nominal Dimensions Pickets: 3" x 15", 6" x 18"
- Nominal Dimensions Left & Right Miters: 3" x 15", 12" x 12"
- Nominal Dimensions Tile Frames: 19 11/16" x 19 11/16"
- Nominal Thickness: 1/8"
- Carton Quantity: 16 - 50 Tiles

### Technical Data

- LEED v2009 IEQ Credit 4.1: Qualifies
- ASTM F1344 - Rubber Floor Tile: Class I, Type A & B, Grade 1
- ASTM E648 (NFPA 253) - Critical Radiant Flux: Class I, > 0.45 W/cm<sup>2</sup>
- ASTM E662 (NFPA 258) - Smoke Density: Passes < 450
- ASTM F970 - Static Load Limit: Passes, 250 PSI
- ASTM F970 - Max Weight: 1100 PSI
- ASTM F925 - Chemical Resistance: Passes
- ASTM D2047 - Slip Resistance: > 0.6
- ASTM F1514 - Heat Color Stability: ΔE < 8 Avg.
- ASTM D3389 - Abrasion Resistance: < 1 g loss (1000 cycles)
- ASTM F2199 - Dimensional Stability: < 0.15% (MD & AMD)
- ASTM G21 - Resistance to Fungi: Excellent
- ASTM E492/E989 - Impact Sound: IIC 63
- ASTM E90 / E413 - Airborne Sound: STC 51
- ASTM E2179 - Effectiveness of Floor: ΔIIC 9
- Acclimation Time: 48 Hours
- Storage & Acclimation Temperature: 65 ° - 85 ° F

### Approved Adhesive\* (Visit our website for complete Adhesive recommendations)

- SP-500 Aerosol Adhesive
- AP-520 Acrylic Pressure Sensitive Adhesive
- AW-510 Acrylic Wet-Set Adhesive
- MS-700 Modified Silane Adhesive
- EW-710 Epoxy Wet-Set Adhesive

### Installation\* (Visit our website for complete Installation instructions)

All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact. Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C). DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation.

### Maintenance\* (Visit our website for complete Maintenance instructions)

Sweep, dust mop or vacuum the floor to remove any dirt, dust or debris.

### Availability, Cost & Samples

Roppe Flooring products are sold through distribution. To locate the nearest distributor, visit [www.roppe.com](http://www.roppe.com). or send an email to [solutions@roppe.com](mailto:solutions@roppe.com)

### Technical Document Support

Additional product resources and technical documents are available online at [www.roppe.com](http://www.roppe.com). For additional technical support, send an e-mail to [solutions@roppe.com](mailto:solutions@roppe.com)

### Warranty

Roppe Provides a 5 year Warranty for all Designer's Choice rubber tile. For additional information, see associated Warranty documents.

\*For complete adhesive, installation & maintenance instructions, visit [www.roppe.com](http://www.roppe.com)