


Tuflex® Spartus Rubber Tile

Manufacturer

Roppe Corporation
1602 N. Union Street
P.O. Box 1158
Fostoria, Ohio USA 44830-1158
Website - www.roppe.com
t: (419) 435.8546
tf: (800) 537.9527
f: (419) 435.1056
e-mail: sales@roppe.com

Product Description

Tuflex® Spartus Multipurpose Sports flooring tiles, developed for sports and commercial applications, have been proven in the industry since 1957. Tuflex Spartus tiles are manufactured using a simultaneous vulcanization process and a new, industry-leading Red List chemical free formulation that is FREE of tire-derived crumb rubber – the first in the industry!

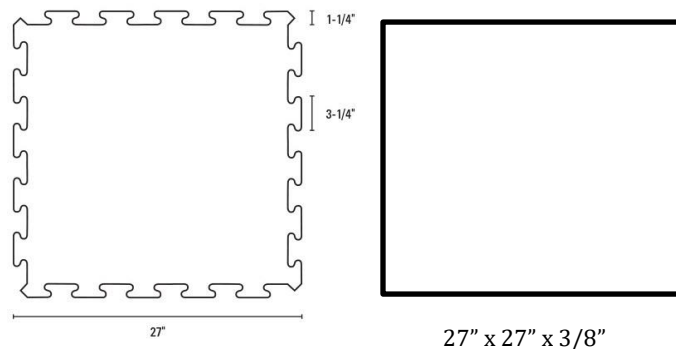

Square Edge Tiles

Nominal Dimensions: 27" x 27" x 3/8" (9 mm)
Finish: Smooth
Area per Tile: 5.06 sq. ft.

Interlocking Tiles

Nominal Dimensions: 25 3/4" x 25 3/4" x 3/8" (9 mm)
Finish: Smooth
Area per Tile: 4.6 sq. ft.

Approved Adhesive* (*Visit our website for complete Adhesive recommendations*)

MS-700 Modified Silane
EW-710 Epoxy Wet Set Adhesive

Technical Data

ASTMD2047, Coefficient of Friction: > 0.8
ASTM E648, (NFPA 253), Critical Radiant Flux: Class I, >0.45 W/cm²
ASTM D2240, Hardness: Shore A; 70 +/- 5
ASTM F970, Static Load Limit: Passes, 250 PSI
ASTM F970 (Modified), Max Weight: 1000 PSI
ASTM F1515, Light Stability: Passes, ΔE < 8
ASTM E90, Sound Transmission Loss: 52 STC*, 63 STC**
ASTM E492, Impact Sound Transmission: 52 IIC*, 67 IIC**
ASTM E2179, Delta Impact Insulation: 22 ΔIIC*
Acclimation Time: 48 Hours
Storage & Acclimation Temperature: 65 ° - 85 ° F
*6" Concrete, No Drop Ceiling
**6" Concrete, With Drop Ceiling

Installation* (*Visit our website for complete Installation instructions*) All materials are to be delivered to the installation location within 48 hours of installation in its original packaging with labels intact.

Store products in a dry area protected from the weather with temperatures maintained between 65° F (19°C) and 85° F (30°C).

DO NOT stack pallets. Remove all plastic wrapping and strapping from the pallets and un-box all material in the installation area at least 48 hours prior to installation.

Maintenance* (*Visit our website for complete maintenance instructions*)

Tuflex Spartus requires initial maintenance along with daily and routine care and maintenance with cleaning equipment to maintain the desired appearance. The frequency of daily and routine maintenance will depend upon the amount and type of traffic in the area.

Technical Document Support

Additional product resources and technical documents are available online at: www.roppe.com or email: support@roppe.com
For additional technical support, send an e-mail to: solutions@rhctech.com

Warranty

Roppe Provides a 10 year Limited Warranty and a Lifetime delamination warranty. For additional information, see associated Warranty documents.

*For complete adhesive, installation & maintenance instructions, visit: www.roppe.com